


EF460S AUTOMATIC EDGE BANDER

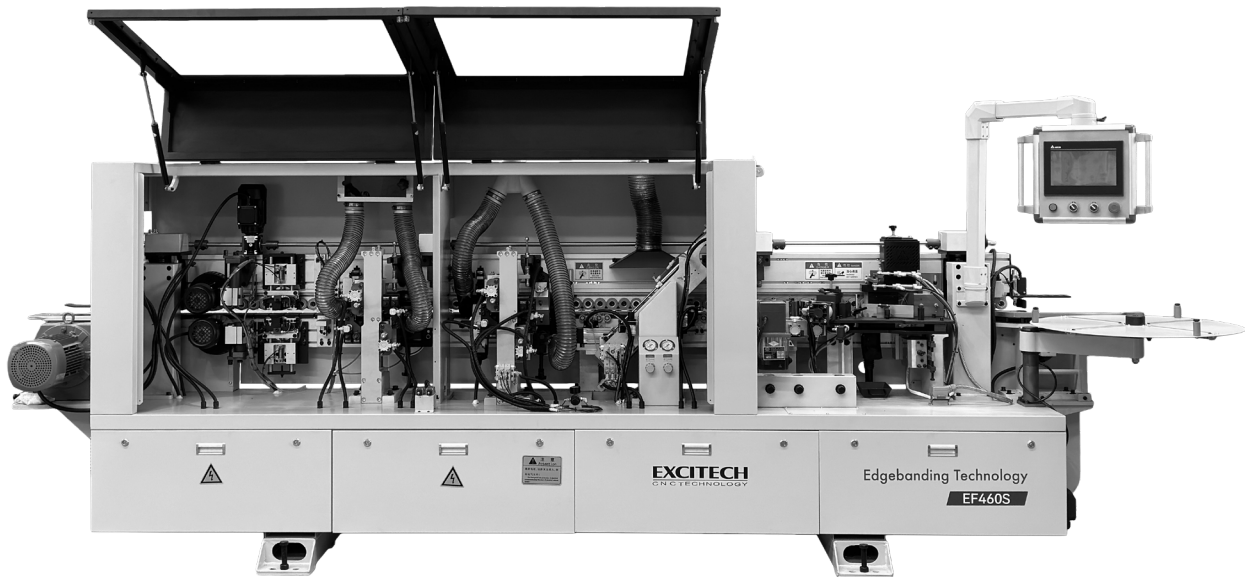

DESCRIPTION

This compact and versatile edge bander is a product that is efficient at handling the fundamental applications required in every factory. The model specifications include gluing, end trimming, radius scraping, flat scraping and off cut, spray cleaning agent, buffing and hinge protection.


KEY FEATURES

- Tape total meter calculation function within a period of time (like one day, one week or one month)
- Workpiece quantity calculation function within a period of time (like one day, one week or one month)
- Machine running time calculation function within a period of time (like one day, one week or one month)
- Workpiece thickness auto measurement, if panel thickness is over setting thickness, it pauses automatically

STANDARD CONFIGURATIONS

Model	EF460S
Workpiece length	Min 150 mm
Workpiece width	Min 80 mm
Workpiece thickness	10-60 mm
Edge thickness	0.4-3 mm
Edge width	12-65 mm
Feed speed	16-20 m/min
Net Weight	1415 kg
Input voltage	415 V
Input frequency	50 HZ
Output frequency	200 HZ
Total power	8.5 KW
Machine dimension	4320*900*1600 mm
Packing size	4420*1050*1720 mm

KEY FEATURES EF460S AUTOMATIC EDGE BANDER




Gluing Unit and Heating Lamp
High precision glue roller ensures perfect gluing on various materials. Temperature is controlled by a meter heat preservation can be set.



Automatic lubrication system, make the maintenance easy.




Delta Touch Screen




Off-cut by removing the PVC chips which left on the parts during the Radius scraping, which can avoid the chips winding on the buffing motors.




Heat Lamp takes the chill out the board to pre heat the board so glue does not set too quickly.



Flat Scraping
Remove the extra glue which may be left on the panel top and bottom.




Fine Trimming & Scraping Unit
Two motors traveling on linear guides for end trimming.



Hinge Kit Protection



End Trimming & reciprocating cloth wheels make clean and high gloss buffing. Spray cleaning agent for perfect polishing.



Gravity Fed Top Glue Pot
Teflon Coated (nonstick)
Easy Cleaning
Makes colour changes easy
EVA to PUR Glues



Edge Press by Rollers
One big precision roller and 3 small to make sure the edge is pressed seamlessly to the workpiece. All rollers have their independent pressure control valve. The latter further ensures that the edge is properly pressed to the workpiece